




picture similar

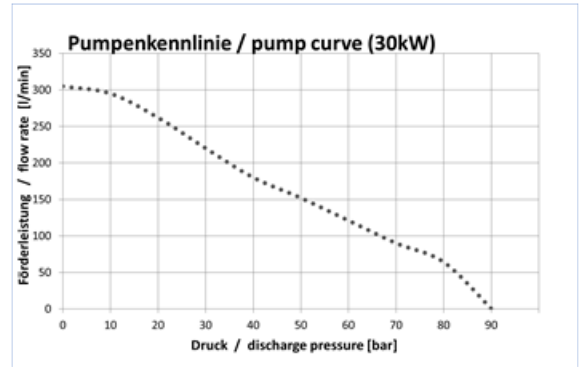

### Application areas:

- Sealing, gap and conduct grouting
- Anchor injection, ground stabilization, rock injection
- Drill injection
- Jet grouting, pipe roof grouting
- Cavity filling
- Micro tunnelling

### Discharge and grouting of :

- Cement, bentonite and tone slurries, water glass or other gels
- Cement slurries, anchor grout
- Bentonite and tone slurries
- Cement slurries
- Cement and fly ash slurries
- Bentonite, cement and insulation slurries

#### Technical Data / Performance Data \*

Flow rate	0-300	l/min continuously adjustable
Discharge pressure	max. 90	bar continuously limited
Solids grain size	max. 2	mm
Pressure connection	42L	EO24° (IG 1½")
Suction connection	Storz C	2" standard coupling DIN14307, alternatively 2" IG
Power connection	CEE-plug	63A, 5-pole with phase inverter
Power input	32,0	KW
Voltage	400	V; 50 Hz
Dimensions	1,8 x 1,1 x 2,1	m ( L x W x H)
Weight	approx.1560	kg

)\* The specified performance data are non-binding values, depending of the rheological slurry characteristics.

**GERTEC**  
Maschinen- und Anlagenbau  
GmbH

Gewerbepark 3  
D-87477 Sulzberg

Phone.: +49(0)8376-98791-0  
Fax: +49(0)8376-98791-99  
info@gertec-gmbh.de

Art.No.: 40514

Edition: 2022-05-26

Technical specifications are  
subject to change

page 1 / 2

### Features:

- ✓ **compact hydraulic power pack** consisting of:
  - sound insulated and encapsulated sheet steel construction, floor assembly constructed as oil drain tank
  - electric drive with vibration-damping fixing for engine
  - hydraulic variable displacement pump and hydraulic fixed displacement pump
  - welded hydraulic tank incl.:
    - visual oil level indicator and electrical minimum level guard
    - oil return filter including visual contamination indicator
    - venting nozzles
    - separate oil drain nozzles
  - hydraulic control block incl. 2 electrical proportional valves (1 x electrical continuously adjustment of the pump flow rate, 1 x electrical continuously limiting of the pump discharge pressure)
  - air-oil cooler
- ✓ **Double plunger pump** vertical mounted; self-running ball valves, hydraulic drive
- ✓ **Pump pressure line** with 2 lubricated high-pressure ball valves (1 x possible pressure relief/circulation, 1 x pressure connection plunger pump); pressure line incl. diaphragm seal and visual pressure display (manometer 100 mm)
- ✓ **Transport traverse** with central hitch
- ✓ **Sled-base frame** galvanized with forklift pockets
- ✓ **Electrical function and power control** incl.:
  - light indicator button Pump ON / OFF
  - electrical adjustment of pump flow rate 0-100%
  - electrical adjustment of pump discharge pressure 0-100%
  - operation mode switch (far / near / maintenance)
  - resettable stroke counter (pump strokes)
  - light indicator button acknowledge fault
  - emergency-off button
  - various push buttons maintenance operation

### Accessories (not included in delivery):

- Remote control (cable or radio)
- Data logger
- Discharge hoses
- LED lauder (telescoping)
- Spare and wearing part package

**GERTEC**Maschinen- und Anlagenbau  
GmbHGewerbepark 3  
D-87477 SulzbergPhone.: +49(0)8376-98791-0  
Fax: +49(0)8376-98791-99  
info@gertec-gmbh.de

Art.No.: 40514

Edition: 2022-05-26

Technical specifications are  
subject to change

page 2 / 2