




picture similar

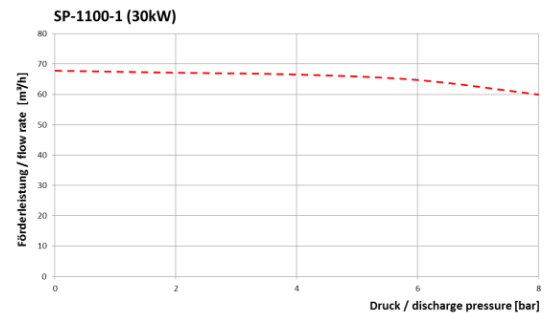

### Application areas:

- Special foundation engineering, Tunnelling (bored pile, cut-off wall, jet grouting)
- Biogas production

### Pumping of:

- Bentonite slurries, drilling fluids, sealing wall slurries, groundwater, mortar, slurries, dirty water, cement, fly ash or other solid-containing slurries
- Return suspensions
- Slurries
- Biomasses, Press water

### Technical Data / Performance Data \*

Flow rate	max. 70	m³/h
Discharge pressure	max. 8	bar
Suction lift	max. 8	m
Solids grain size	max. 32	mm
Medium temperature	max. 50	°C
Nominal diameter of hose	100	mm
Suction connection	Storz A	4" standard coupling DIN 14307, alternatively 4" AG, flange DN100 PN16
Pressure connection	Storz A	4" standard coupling DIN 14307, alternatively 4" AG, flange DN100 PN16
Power connection	CEE-plug	63 A, 5-pole
Power input	31	kW
Voltage	400	V; 50 Hz
Dimensions	1,57 x 1,69 x 1,63	m ( L x W x H)
Weight	1.680	kg

)\* The stated values are approximate values and refer to the pumping of water with 18 ° C. Conditionally by abrasion of the hose pump, unfavourable suction, pressure conditions and influence of viscosity of the pumping medium may differ the actual performance data from the specified data.

### Characteristics:

- dry running
- self-priming
- reversible
- low pulsation
- high productivity
- high operating reliability
- easy wear compensation of the hose pump via eccentric adjustment
- central lifting eye for crane handling
- forklift handling from long and transverse side, lift truck handling from long side

### Features:

- ✓ **Steel frame** with forklift pockets and central lifting eye
- ✓ **Pump housing** with pivoting housing cover
- ✓ **Pump drive** with reinforced bearing
- ✓ **Pump rotor** with rotatable mounted pressure rollers including eccentric adjustment
- ✓ **Hose rupture detection**
- ✓ **Vacuum unit** to support suction capability
- ✓ **Pulsation damper** reduces the flow rate pulsation
- ✓ **Pressure switch-off** (safety device)
- ✓ **Remote control connection** arranged
- ✓ **Operating manual** and spare parts list
- ✓ **Electrical function and power control** with the following display and control elements:
  - Main switch ON/OFF
  - Pump ON/OFF
  - Vacuum pump ON/OFF
  - Selector switch reversing operation (forwards/backwards)
  - Selector switch on-site/remote control
  - Display hose rupture detection
  - Display combined fault

### Accessories (not included in delivery):

- Cable remote control
- Radio remote control
- Suction filter
- Suction tube
- Suction and pressure connections

**GERTEC**Maschinen- und Anlagenbau  
GmbHGewerbepark 3  
D-87477 SulzbergPhone: +49(0)8376-987 91-0  
Fax: +49(0)8376-987 91-99  
info@gertec-gmbh.de

Art.No.: 33345

Edition: 2022-04-06

Technical specifications are  
subject to change

page 2 / 2